




TECHNICAL PROPERTIES



EN388

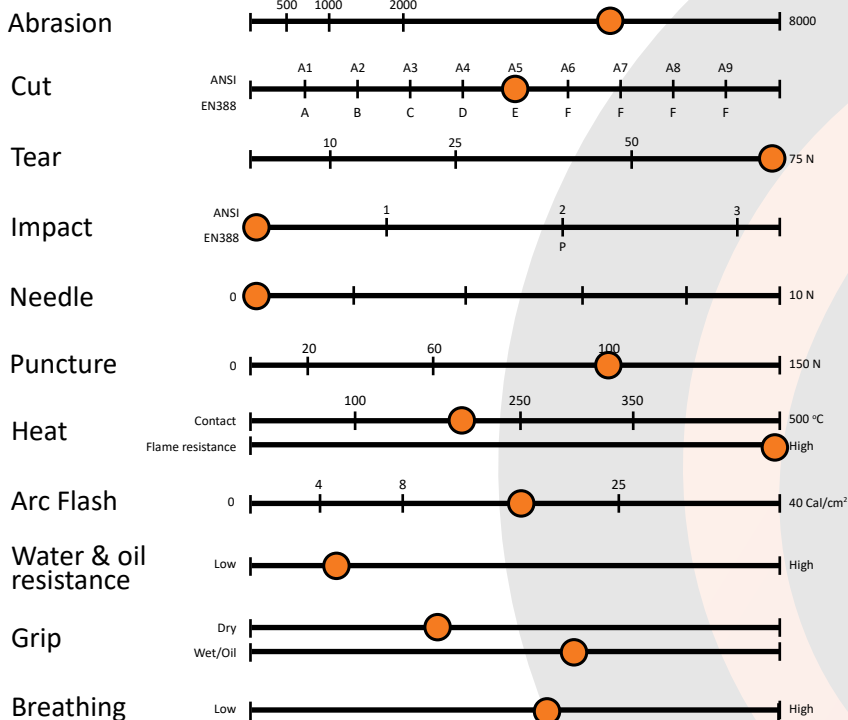

3X42E

EN407



41312X

ARC FLASH

ASTM F2675, ATPV=

17,1 Cal/cm² (back of hand)

NFPA 70E=

Level 2

ISO (A-F)
A | > 2 N
B | ≥ 5 N
C | ≥ 10 N
D | ≥ 15 N
E | > 22 N
F | > 30 N



EN1149-1



1,18.10⁹ Ω

ART.NO: 13-4HAF-17
60 pairs (5 dozen)/Carton

CE 1493 **7 8 9 10 11 12**
CAT III XS S M L XL XXL